

# *Welding Supplies*

*A catalogue of best selling and popular items*



redhook supply

## Fibre-Metal Style Cable Connectors

Part No.	Description
FM-40	Cable Connector - Complete Set
FM-40M	Cable Connector - Male Half
FM-40F	Cable Connector - Female Half



Part No.	Description
MWG-300E	Ground Clamp, 300 amp
MWG-500E	Ground Clamp, 500 amp



Part No.	Description
MWG-200A	Alerco Style Ground Clamp, 200 amp
MWG-300A	Alerco Style Ground Clamp, 300 amp
MWG-500A	Alerco Style Ground Clamp, 500 amp



Part No.	Description
MW-400S	400 amp Short Stub Electrode Holder
MWK-400S	Replacement Head to MW-400S
MW-600S	600 amp Short Stub Electrode Holder

Part No.	Description
MW-002	2" x 30 psi Gauge w/ Red Line 1/4" NPT
MW-005	2" x 100 psi Gauge 1/4" NPT
MW-006	2" x 200 psi Gauge 1/4" NPT
MW-007	2" x 400 psi Gauge 1/4" NPT
MW-010	2" x 4000 psi Gauge 1/4" NPT
MW-022	2.5" x 30 psi Gauge w/ Red Line 1/4" NPT
MW-026	2.5" x 200 psi Gauge 1/4" NPT
MW-027	2.5" x 400 psi Gauge 1/4" NPT
MW-030	2.5" x 4000 psi Gauge 1/4" NPT
MW-017	2" 0-50 cfm Gauge 1/4" NPT
MW-041	1 1/2" 0-4000 psi 1/8" NPT Backport



**Includes**  
10' #2 Flex Cable  
LC-1040 Connector  
MW-400S Electrode Holder

*Call for a quote on your custom cable requirement*

Part No.	Description
MW-WHIP	Whip Cable Assembly



Part No.	Description
MW-MNC	Mig Nozzle Cleaner



Part No.	Description
MW-12	Chisel and Point Chipping Hammer



Part No.	Description
MW87096	Nozzle Dip 16 oz.



Part No.	Description
MW-MP	Mig Pliers



Part No.	Description
MW-FT	Replacement Flow Tube Assembly



Part No.	Description
MW-AWS	Automatic Weld Size Gauge
MW-BCG	Bridge Cam Gauge
MW-FWG	Fillet Weld Gauge 7 piece stainless steel
MW-HLS	Single Purpose Hi-Lo gauge
MW-HLM	Multi-Purpose Hi-Lo Gauge




Economical Welding Accessories



Part No.	Description
FE-1777	Long Handle Brush, 3 x 19
MW-SHB	Shoe Handle Brush, 4 x 16



Part No.	Description
MW-SFL	Single Flint Lighter
MW-TFL	Triple Flint Lighter
MW-SFR	Single Flint Renewals - 5 per pack
MW-TFR	Triple Flint Renewals - 4 per pack

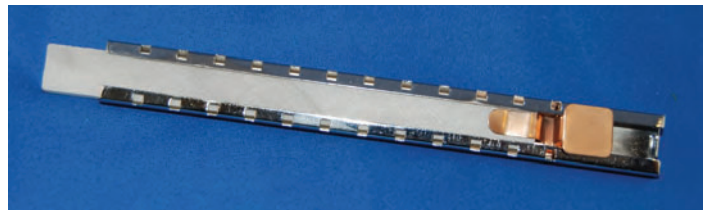

Part No.	Description
MW-SSH	Soapstone Holder w/ Flat Soapstone
1041	Flat Soapstone - per gross



Part No.	Description
MW-7549	Standard Tip Cleaners



## Teflon Tape

Orange Teflon tape seals all metal and plastic threaded joints. Effective from -400° to 600° F.



Part No.	Description
224	1/4" x 260" T-Tape
225	1/2" x 260" T-Tape
226	1/2" x 540" T-Tape
226B	1/2" x 1296" T-Tape

## Spark Lighters



Part No.	Description
3001	Single Flint Lighter
4501	Triple Flint Lighter
3001X	Single Flint Renewals / Box of 200
5003X	Triple Flint Renewals 1 / card
730	Shoot-A-Lite w/ 5 renewals

## Tip Cleaners



Part No.	Description
WS-7549	Standard Tip Cleaners
WK-7549	King Tip Cleaners

## Victor Style Tips



Part No.	Description
MW1-101	1-101 Cutting Tip Size 000-5
MW3-101	3-101 Cutting Tip Size 000-5

## Circle Burners



Part No.	Description
CB-20	18" Circle Burner
CB-30	30" Circle Burner
CBM-2030	Magnet for CB-20/30

## Quick Connects



Part No.	Description
WE-QDB10	Torch to Hose
WE-QDB20	Hose to Hose
WE-QDB30	Regulator to Hose

## Flash Arrestors



Part No.	Description
WE-FA-10	Torch Flash Arrestor Set
WE-FA-30	Regulator Flash Arrestor Set

## Hose Parts



Part No.	Description
WE-7	'B' Size Oxygen Nut
WE-8	'B' Size Acetylene Nut
WE-17	'B' Size Barbed 1/4" Hose Nipple
WE-18	'B' Size Barbed 3/16" Hose Nipple


## Flowmeter Regulator



Part No.	Description
RF1430-580	Argon Flowmeter Regulator
FM-060	Argon Flowmeter

## Burning Bars

Burning bars are consumable thermal pipes designed to economically cut, sever or burn holes through all types of ferrous & non-ferrous metals, copper, slag, concrete, refractories, etc.



Part No.	Description
CALDO-11/16	Double Wall 11/16" x 10' 6"
BBPE-675	Plain End .675" x 10' 6"
LP675FGS	Burning Bar Holder



## Drill Kit



## Inspection Mirror

K-2



## Chipping Hammers

DK100



WH-30



LPHH

## Soapstone Holders



SH-400-1



SSR200

## Gloves



## Hand Heat Shield



44-3006



Part No.	Description
66BI	Split Leather Work Glove
505I	5 Finger Leather Welding Glove
501I	1 Finger Leather Welding Glove
MW-TG-L	Tig Glove - Large
MW-TG-M	Tig Glove - Medium

### Prevent Spatter Build Up

Parent metal and fixture applications come out cleaner and better appearing because Weld-Kleen products are engineered and guaranteed to prevent spatter build-up. Reduce need for grinding and other clean-up procedures.


Weld Kleen 350 is a water based product for most parent metal jobs. Biodegradable, non-toxic and paintable. Can be frozen. Available in bulk. For stainless steel, please use Nozzle Kleen Heavy Duty.

Part No.	Description
WA-7089	Weld Kleen 350 - Quart
WA-7090	Weld Kleen 350 - Gallon
WA-7091	Weld Kleen 350 - 5 Gallon
WA-7030	Weld Kleen Heavy Duty



Nozzle Kleen #2 prevents spatter build up. Tips, nozzles and gas diffuser areas stay clean of spatter with these engineered, guaranteed products. Non-flammable and paintable. No methylene chloride, no fluorochemicals.

Part No.	Description
WA-7022	Nozzle Kleen #2 16 oz.

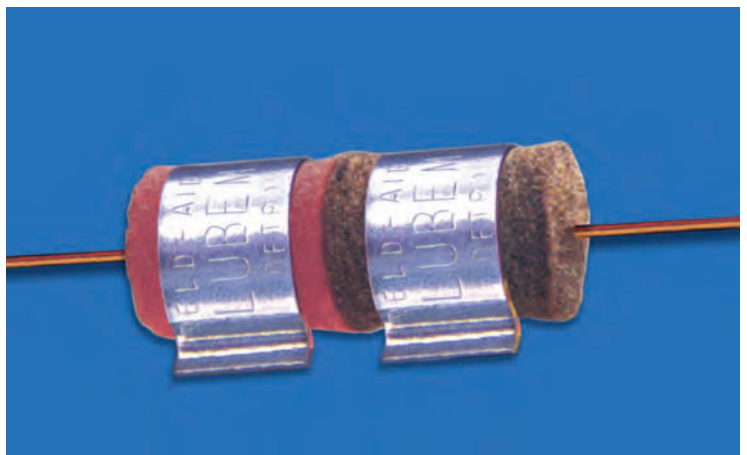

### Feed and Clean Wire

Rusted or shop floor contaminated wire, or wires that exhibit poor cast or helix, lose up to 60% of drag. Weld-Aid Lube-Matic products are engineered to clean and lubricate wire, improve feedability, cut spatter and promote longer tip and liner life. Burn backs and arcing that result from liner and tip jamming virtually disappear.

Part No.	Description
WA-7060	Lube Pads, Package of 6 pads
WA-7061	Wire Kleener Pads, Package of 6 pads
WA-7040	Lube Matic Lubricant, 5 oz.




## Cable Connectors



Cam action design pulls two halves tightly together. Covers are molded from a heat resistant material. Single oval point screw on LC-10, LC-40 and double oval point screw on LC-40HD hold cable secure. Covers also available in Red, Blue, Yellow, Green, Pink and Orange.

Part No.	Description
LC-10	Complete Set #4 - 1/0
LC-40	Complete Set 1/0 - 2/0
LC-40HD	Complete Set Heavy Duty 3/0 - 4/0
LC-10F	Female Half
LC-10M	Male Half
LC-40F	Female Half
LC-40M	Male Half
LC-40HDF	Heavy Duty Female Half
LC-40HDM	Heavy Duty Male Half

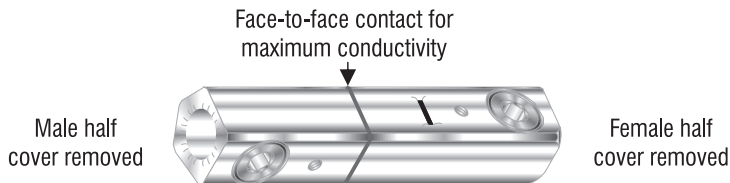

## Dinse Connectors

Today more welding power sources are equipped with International style connectors for secondary connections. LENCO now offers International *Dinse* type machine plugs for use with No.8 (10mm<sup>2</sup>) through 4/0(95mm<sup>2</sup>) AWG size cable.

LENCO also offers 6 one-piece adapters which have a *Dinse* type male ([power source] .355[9.0mm]; .508[12.9mm]) on one end and a LENCO female LC-10, LC-40/LC-40HD or Cam-Lok on the opposite end.



Part No.	Model No.	Description
L05289	LDP-25M	Dinse Plug Set (Red & Black)
L05309	LDP-50M	Dinse Plug Set (Red & Black)
L05319	LDP-70M	Dinse Plug Set (Red & Black)
L05329	LDP-95M	Dinse Plug Set (Red & Black)
L05330	LDA-B	Dinse - LC-40 Adaptor Black
L05331	LDA-R	Dinse - LC-40 Adaptor Red
L05420	LDC-25	Dinse Connector Set M & F
L05430	LDC-50	Dinse Connector Set M & F
L05440	LDC-70	Dinse Connector Set M & F
L05450	LDC-95	Dinse Connector Set M & F

## Connector Terminals



Quickly connect or disconnect welding cable at the power source. Available for use with LC-10, LC-40, LC-40HD or Dinse style connectors.

Part No.	Model No.	Description
L08010	CT-10FA	Angle Connector (LC-10)
L08020	CT-10FS	Straight Connector (LC-10)
L08030	CT-40FA	Angle Connector (LC-40)
L08040	CT-40FS	Straight Connector (LC-40)
L08110	LDCT-50A	Angle Connector (Dinse)
L08120	LDCT-50FS	Straight Connector (Dinse)

## Swedge-On Cable Lugs



Part No.	Description
L-26	No. 2 thru No. 6 Cable
L-12	No. 1 thru No. 2 Cable
L-1020	No. 1/0 thru No. 2/0 Cable
L-3040	No. 2/0 thru Number 4/0 Cable



## Electrode Holders



AF style holders have a powerful spring to hold the electrode securely in place. The upper lever is fully insulated with a low profile design. Made in U.S.A.

Part No.	Model No.	Description
L01020	AF-2	200 Amp
L01030	AF-25	250 Amp
L01040	AF-3	300 Amp
L01050	AF-35	350 Amp
L01060	AF-50	500 Amp

## Duro Holders



Dependable and efficient holders since 1932. All parts are easily replaced using a screwdriver and wrench. Made in U.S.A.

Part No.	Model No.	Description
L016250	250-I	250 Amp
L016300	300-I	300 Amp
L016400	400-I	400 Amp
L016600	600-I	600 Amp

## Short Stub Holders



Twist type holders, hold electrode up to 1/4" securely. L-400 & L-600 has two oval point screws to securely hold cable. L-400S has one oval point screw. Assembled in Canada.

Part No.	Description
L-400	400 Amp
L-400S	400 Amp Molded Handle
L-600	600 Amp Heavy Duty
LK-400	Replacement Head L-400, L-400S
LK-600	Replacement Head L-600

## Economy Ground Clamps



The Model EG-200 ground clamp is ideal for light duty welding. May be used for other light duty applications. The Model EG-300 ground clamp is ideal for the farm welder or for light shop work. The Model EG-500 is excellent for field erection or where clamping to bar stock, piping or various shapes of metal is necessary. The pure copper braided shunt allows both high copper alloy jaws to carry welding current. A rugged, all steel body protects the heavy duty spring.

Part No.	Model No.	Description
L02000	EG-200	200 Amp
L02040	EG-300	300 Amp
L02050	EG-500	500 Amp

## High Copper Alloy Ground Clamps



LENCO ground clamps have the largest contact area with the work of any clamp on the market. Serrated upper and lower jaws insure maximum bite to the work. A good ground clamp helps assure proper voltage for maximum weld results with all rods. Both upper and lower jaws of all three models are made from a high copper alloy assuring excellent current carrying ability. No steel jaws are used. A good ground connection assures better welds. A tough, brass hinge pin is durable and allows both jaws to carry current. The enclosed heavy duty spring assures a powerful bite on the work. The insulation on top and bottom provides extended spring life. All three sizes of the original LENCO ground clamps have the oval-point screw cable connection which is easy to install. No shim stock or pressure plate is needed.

Part No.	Model No.	Description
L02010	200	200 Amp
L02020	300	300 Amp
L02030	500	500 Amp


## Model G Ground Clamp



Apply up to 2,000 lbs. (907kg) pressure with the copper coated pressure screw and swivel pad. Heavy alloy casting with a full 3-3/8" (85.7mm) jaw opening. (Pressure screw thread - 3/4 - 10)

Part No.	Model No.	Description
L02060	G	600 Amp


## Model C Rotary Ground

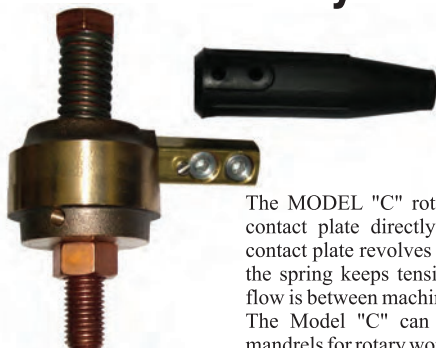

The MODEL "C" rotary clamp bolts the stationary contact plate directly to the work. The movable contact plate revolves like a "ferris wheel action" and the spring keeps tension on the two faces. Current flow is between machined faces. Cables will not bind. The Model "C" can also be installed on ends of mandrels for rotary work.

Part No.	Model No.	Description
L02080	C	500 Amp


## MIG-600 Ground Clamp



The LENCO MIG-600 ground clamp is designed especially for the MIG welding process. Its powerful bite and swivel pad allow for low resistance ground connections. It has a full 2 inch opening and a copper coated steel pressure screw. The 5/16" copper coated steel "T" handle makes it easy to apply maximum pressure. Cable attaches with two oval-point screws and comes with the connector insulator. Also available is the Model MIG-600-D which has a quick detachable connector.

Part No.	Model No.	Description
L02070	MIG-600	600 Amp
L02081	MIG-600D	600 Amp Quick Connect

## Combination Ground Clamp

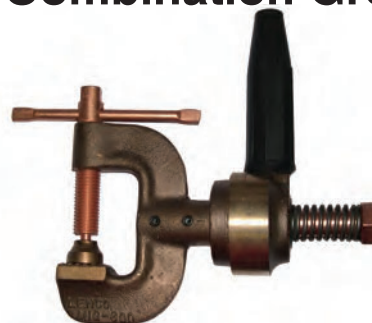

The two LENCO rotary devices shown here, the **GC-500** and the **MIG-600-C**, are combinations of LENCO products to provide rotating grounds. Both use the Model "C" rotary clamp (see page 10). Both are designed to make it easy to attach the rotating portion to the work. The units come completely assembled, ready to attach to the work. They are field proven and do an excellent job.

Part No.	Model No.	Description
L02120	GC-500	500 Amp
L02130	MIG-600-C	500 Amp

## AEC 3000 / 5000



- Unique valve design
- Easy field repair
- Special high impact, heat resistant material
- Available w/7' swivel or non-swivel cable assembly
- Special hard copper alloy body w/excellent Electrical conductivity
- Optional 12' swivel cable assembly available

Part No.	Description
AEC-3001	Complete Torch No Cable
AEC-3000	Complete Torch w/ 7' Cable
AEC-3000-1	Complete Torch w. 7' Swivel Cable
AEC-5001	Complete Torch No Cable
AEC-5000	Complete Torch w/ 7' Cable
AEC-5000-1	Complete Torch w. 7' Swivel Cable

### • Replacement Part Available •

- Unique valve design
- Available w/7' swivel or non-swivel cable assembly
- Special high impact, heat resistant material
- Special copper alloy forged body
- Optional 12' swivel cable assembly available
- Easy field repair

Part No.	Description
AEC-3501	Complete Torch No Cable
AEC-3500	Complete Torch w/ 7' Cable
AEC-3500-1	Complete Torch w. 7' Swivel Cable
AEC-4001	Complete Torch No Cable
AEC-4000-1	Complete Torch w. 7' Swivel Cable

## AEC3500 / 4000



## DC Copper Coated Pointed Gouging Carbons



Part No.	Description
3/16-12CC	3/16" x 12" (Box of 50)
1/4-12CC	1/4" x 12" (Box of 50)
5/16-12CC	5/16" x 12" (Box of 50)
3/8-17JCC	3/8" x 17" Jointed (Box of 50)





- Manufactured to the same high standards as original
- Mig guns also available in 10' and 12'
- Additional styles also available

Part No.	Description
<b>Bernard Style Replacement</b>	
CB2-4215AE	200 Amp Euro Plug, 15'
CB2-4215AL	200 Amp Lincoln Plug, 15'
CB2-4315A	300 Amp Bernard Plug, 15'
CB2-4315AM	300 Amp Miller Plug, 15'
CB2-4315AE	300 Amp Euro Plug, 15'
CB2-4315AL	300 Amp Lincoln Plug, 15'
CB2-4415A	400 Amp Bernard Plug, 15'
CB2-4415AM	400 Amp Miller Plug, 15'
CB2-4415AE	400 Amp Euro Plug, 15'
CB2-4415AL	400 Amp Lincoln Plug, 15'
<b>Binzel Style Replacement</b>	
C700-24-O15	220 Amp Euro Connect, 15'
C700-24-M15	220 Amp Miller Plug, 15'
C700-24-T15	220 Amp Tweco Plug, 15'
C702-52-015	500 Amp Water Cooled Euro, 15'
C750-26-015	260 Amp Push/Pull Euro 15'
<b>Miller Style Replacement</b>	
<b>C15 Mig Torch Suitable Replacement for Miller</b>	
CM169-589	150 Amp Miller Plug, 10'
<b>C25 Mig Torch Suitable Replacement for Miller</b>	
CM169-598	250 Amp Miller Plug, 15'
<b>Tregaskiss Style Replacement</b>	
CRM2515-35	250 Amp Miller Plug, 15'
CR3015-35	300 Amp Tweco Plug, 15'
CRE3015-35	300 Amp Euro Plug, 15'
CRM3015-35	300 Amp Miller Plug, 15'
CRE4015-45	400 Amp Euro Plug, 15'
CRM5010-45	500 Amp Miller Plug, 15'

## Mini 150 amp Mig Guns



- 150 amp, 10'
- Equivalent to the Magnum 100
- Each gun includes cable support at machine
- Uses 11-30 tips, 51 diffuser, 21-50 nozzle, 35-40-15 liner

Part No.	Description
H-MINI-10	150 amp 10' Mig Gun for Hobart
LWM-MINI-10	150 amp 10' Mig Gun for Lincoln
M-MINI-10	150 amp 10' Mig Gun for Miller
T-MINI-10	150 amp 10' Mig Gun for Tweco
X-MINI-10	150 amp 10' Mig Gun Euro Connect



Reference to genuine manufacturers equipment numbers, names or trademarks is for identification and convenience only.

## Profax Mig Guns

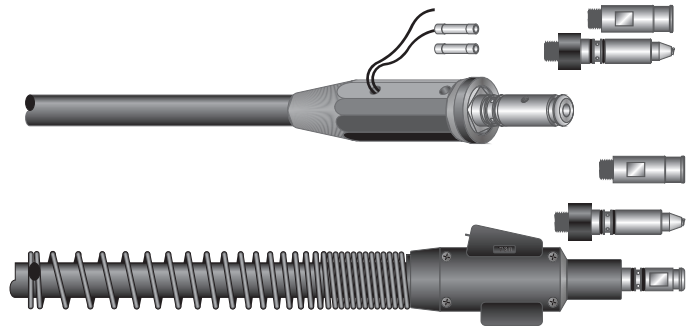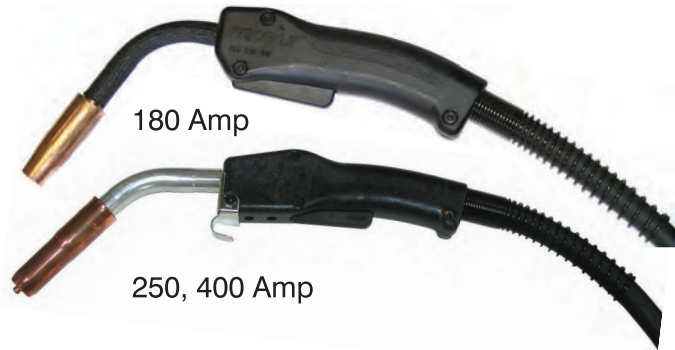


**STANDARD FEATURES:** • Ergonomic handle • Spare switch leads • Extra flexible cable • Adapter kits available for most models of feeders


Part No.	Description
180-23-12	180 Amp, .023, 12'
180-3035-10	180 Amp, .030-.035, 10'
180-3035-12	180 Amp, .030-.035, 12'
250-3035-12	250 Amp, .030-.035, 12'
250-3035-15	250 Amp, .030-.035, 15'
250-4045-12	250 Amp, .040-.045, 12'
400-3545-12	400 Amp, .035-.045, 12'

Part No.	Description
M180-23-12	180 Amp, .023, 12' Miller Connection
M180-3035-12	180 Amp, .030-.035, 12' Miller Connection
M250-3035-12	250 Amp, .030-.035, 12' Miller Connection
M250-4045-12	250 Amp, .040-.045, 12' Miller Connection
M400-3545-15	400 Amp, .035-.045, 15' Miller Connection
X180-3035-12	180 Amp, .030-.035, 12' Euro Connection
X250-3035-12	250 Amp, .030-.035, 12' Euro Connection


## Contact Tips




Part No.	Description
14-35	Tweco Style Contact Tip .035
14-45	Tweco Style Contact Tip .045
14T30	Tweco Style Contact Tip .030 Tapered
14T35	Tweco Style Contact Tip .035 Tapered




Part No.	Description
000-067	Miller Style Contact Tip .030
000-068	Miller Style Contact Tip .035
000-069	Miller Style Contact Tip .045
087-299	Miller Style Contact Tip .023-.025




Part No.	Description
996995	L-Tec Style Contact Tip .035 Hard
996999	L-Tec Style Contact Tip .045-3/64\" Hard

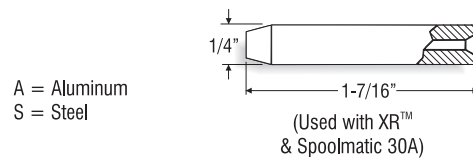

Part No.	Description
135-424	Miller Style Contact Tip .047 A
135-428	Miller Style Contact Tip .030 A
135-429	Miller Style Contact Tip .045 S
135-430	Miller Style Contact Tip .035 A





Part No.	Description
403-1-35	Tregaskiss Style H.D. Contact Tip .035
403-1-45	Tregaskiss Style H.D. Contact Tip .045
403-1-52	Tregaskiss Style H.D. Contact Tip .052
403-1-116	Tregaskiss Style H.D. Contact Tip 1/16\"



Part No.	Description
621-0001	Cobramatic Style Contact Tip .035
621-0003	Cobramatic Style Contact Tip .045-3/64\"



## Lincoln Style Drive Rolls

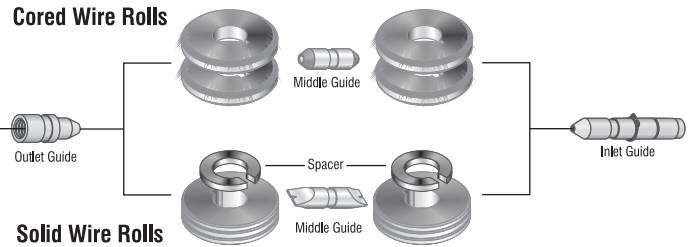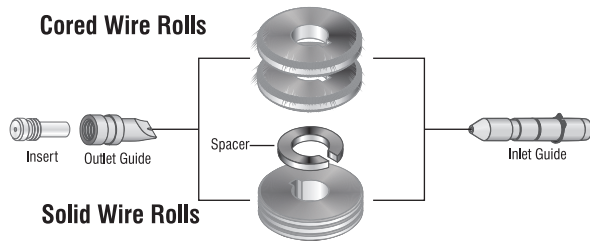

Part No.	Description
KP653-030S	.030 Solid Wire 2 Roll Kit
KP653-035S	.035-.040 Solid Wire 2 Roll Kit
KP653-035C	.035 Cored Wire 2 Roll Kit
KP653-052S	.045-.052 Solid Wire 2 Roll Kit
KP653-052C	.045-.052 Cored Wire 2 Roll Kit
KP653-116	.052-1/16 Solid & Cored Wire 2 Roll Kit

Part No.	Description
KP655-035S	.035-.040 Solid Wire 4 Roll Kit
KP655-035C	.035 Cored Wire 4 Roll Kit
KP655-052S	.045-.052 Solid Wire 4 Roll Kit
KP655-052C	.045-.052 Cored Wire 4 Roll Kit
KP655-116	.052-1/16 Solid & Cored Wire 4 Roll Kit

## Miller Style Drive Rolls

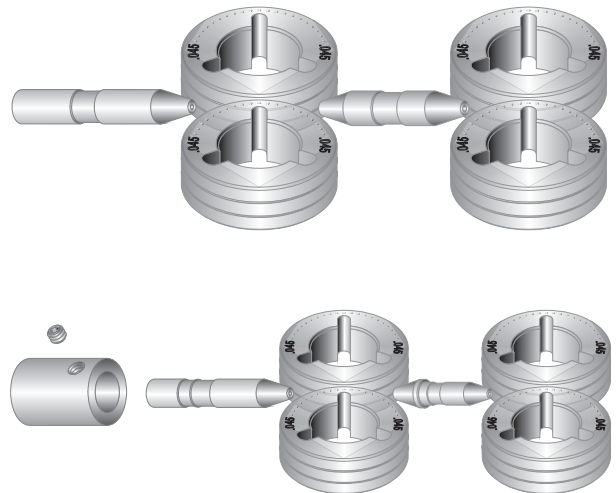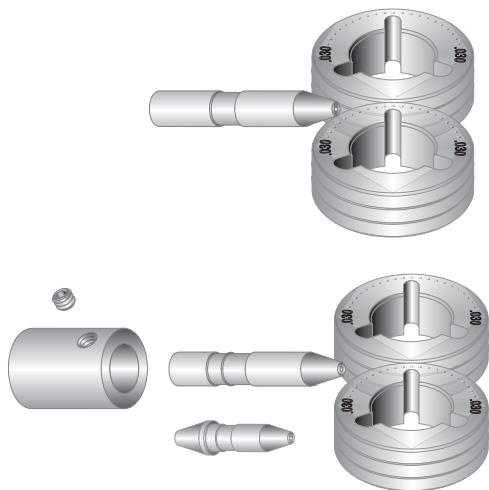

Part No.	Description
087-131	.023/.025 "V" Groove 2 Roll Kit
079-594	.030 "V" Groove 2 Roll Kit
079-595	.035 "V" Groove 2 Roll Kit
079-596	.045 "V" Groove 2 Roll Kit
079-607	.045 "V" Knurled 2 Roll Kit
079-609	1/16" "V" Knurled 2 Roll Kit
151-032	.035 "V" Groove 2 Roll Kit
151-033	.045 "V" Groove 2 Roll Kit
151-062	.045 "V" Knurled 2 Roll Kit
151-064	1/16" "V" Knurled 2 Roll Kit

Part No.	Description
046-781	.035 "V" Groove 4 Roll Kit
046-782	.045 "V" Groove 4 Roll Kit
046-793	.045 "V" Knurled 4 Roll Kit
046-795	1/16" "V" Knurled 4 Roll Kit
151-026	.035 "V" Groove 4 Roll Kit
151-027	.045 "V" Groove 4 Roll Kit
151-036	.035 "U" Groove 4 Roll Kit
151-037	.045 "U" Groove 4 Roll Kit
151-053	.045 "V" Knurled 4 Roll Kit
151-055	1/16" "V" Knurled 4 Roll Kit
151-058	3/32" "V" Knurled 4 Roll Kit

**See Our Full Catalogue For A Complete List of Available Drive Roll Kits, Drive Rolls, and Parts**



## Plasma Filters



This filter is equipped with a mounting bracket that will facilitate an installation on the top, side, or rear panel of the smaller, portable plasma cutting systems. The filter is equipped with 1/4" NPT ports to match the fittings on most plasma systems... and has a rated air flow of over 2,700 PSI.

Part No.	Description
M-26	Plasma Filter
M-723	Replacement Element Box of 4

## Spool Guns



Economical feeder/gun combination eliminates need for additional wire feeder. Lightweight design reduces operator fatigue, 50' hose/cable assembly offers maximum portability for remote operation. Operation is simplified by wire speed control on gun. Mechanical pre-flow and post-flow control. Operator safety provided by plastic housing and low voltage operation.

Model AEC 200 comes complete with gun, nozzles, liners, contact tubes, a wrench and 50' of cable hose assembly. Also available in other lengths.

Part No.	Description
AEC200-36-O	36:1 Ratio Complete Spool Gun
AEC200-36P	36:1 Direct mount for Airco 10 pin
AEC200-36L	36:1 Direct mount (ESAB/L-Tec) 8 pin

## Spool Gun Control Boxes



Use AEC200-1 for constant voltage welding power source.  
 Use AEC200-2 for constant current welding power source.  
 Use AEC200-3A for constant current welding power source not having a contactor.  
 Use AEC200-4C for connecting AEC200-4 to constant voltage welding power source.

Part No.	Description
AEC200-1	Control Box
AEC200-2	Control Box
AEC200-3A	Control Box with Contactor
AEC200-4C	Control Box for AEC200-4

## Solid State Spool Gun




PROFAX HAS GIVEN THE CLASSIC DESIGN OF THE AEC 200 SPOOL GUN A NEW *SOLID STATE* PUNCH. DESIGNED FOR CONSTANT VOLTAGE POWER SOURCES, THIS NEW PUNCH WILL PROVIDE:

- ONE MOTOR FOR .030 THROUGH 1/16" ALUMINUM AND .023 THROUGH .045 HARD WIRES.
- NO MORE CHANGING MOTOR RATIO'S
- NO MORE RHEOSTAT TO GET HOT OR BURN OUT
- 30 TO 800 INCH PER MINUTE CAPABILITY
- 50' GUN CABLE LENGTH STANDARD
- SOLID STATE CONTROL PROVIDES:
  - TRUE CONSTANT SPEED
  - HIGHER MOTOR TORQUE
  - LONGER MOTOR LIFE
  - SMOOTHER WIRE FEEDING


Part No.	Description
AEC200-4	Solid State Spool Gun
AEC200-4DM	Spool Gun Direct for Miller
AEC200-4DMX	Spool Gun Direct Millermatic 250X

## Covers

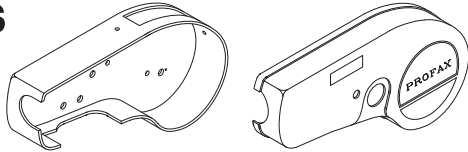

Part No.	Description
2360-2065	Rear Cover - Orange
2360-2064	Front Cover - Orange

## Contact Tips




Part No.	Description
2354-0068	3068 Airco Contact Tip 3/64"
2360-0300	3300 Airco Contact Tip 1/16"
2360-2115	3115 Airco Contact Tip .035 - .047
45-070	3/64" Airco Contact Tip (Not Shown)

## Rheostat & Motors



Part No.	Description
2360-2061	New 36:1 Motor
2360-2106	1106 Airco Rheostat Assembly

## Nozzle Parts




Part No.	Description
2360-7638	4638 New Complete Assembly
2360-6268	4268 Nozzle 7/16"
2360-6269	4269 Nozzle 11/16"
2360-7147S	4147 Airco Nozzle Body
2360-7641	4641 Airco Spacer
2360-7640	4640 Airco Adaptor Sleeve

## Flexible Barrel




Part No.	Description
2360-7925	Flexible Barrel (Liner Included)

## Hose Cable Assembly

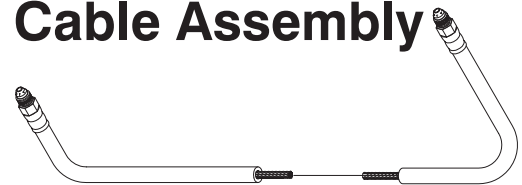

Part No.	Description
2360-2057	1057 Hose Cable Assembly

## Miscellaneous Parts

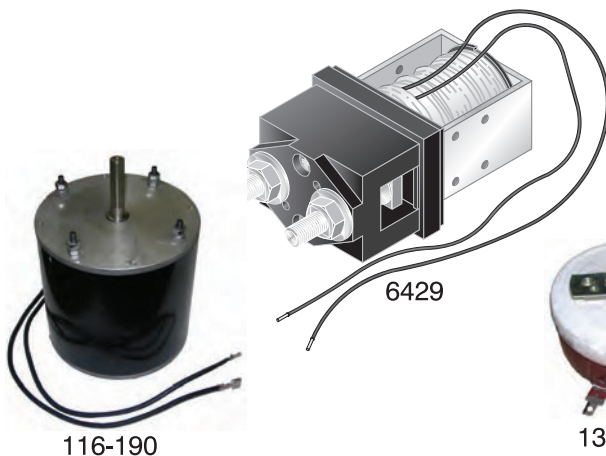

M5090-C



1377-3745



CO2-HEATER



MHC-14-100

Part No.	Description
116-190	Replacement Fan Motor for Miller
220-393	Replacement Fan Motor for Miller
M9983-6	Replacement Fan Motor for Lincoln
6429	M15308-1 Contactor for Lincoln LN25
6427	110361 Contactor for Miller
M5090-C	Lincoln Rheostat 64 Ohm
1377-3745	Miller / ESAB Rheostat 15 Ohm
1377-9168	Miller / ESAB Rheostat 34 Ohm
CO2-HEATER	120V AC CO2 Heater
MHC-14-100	Remote Hand Control for Miller 100'

## Weld Positioners

**WP-250**

**115V**



### FEATURES:

- 13-3/4" Diameter Table
- 0 to 5.5 RPM Rotation Speed
- Manual Tilt Adjustment
- 115V or 230V
- 0 to 90° Tilting Angle
- High Frequency Protected
- Standard w/Foot Control Switch
- Shipping Weight 113 lbs.

Designed for rotation of lighter work pieces. Will hold 440 lbs. in the horizontal position and 250 lbs. in the vertical position.  
Note: C/G of load not to be more than 4" from the center of the turntable and 4" from the face of the turntable.




**WP-500**

### FEATURES:

- 19-5/8" Diameter Table
- 0.4 - 4 RPM Rotation Speed
- Power Tilt Adjustment
- 115V
- 0 to 135° Tilting Angle
- High Frequency Protected
- Standard Fwd./Rev. Foot Control
- Shipping Weight 580 lbs.

Will hold 500 lbs. in the vertical position and 900 lbs. in the horizontal position.  
Note: C/G of load not to be more than 6" from the center of the turntable and 6" From the face of the turntable.



The above illustration shows the chuck mounted to the PROFAX Welding Positioner WP-250.

### FEATURES:

- Low Profile
- Self Centering
- Reversible Jaws
- Easy Mounting
- External & Internal Gripping
- 0" - 8" on O.D.
- 3" - 11" on I.D.
- Shipping Weight 20 lbs.

## Turning Rolls

**TR-2000**

**115V**

230V model available for export P/N: TR-2000-2



### FEATURES:

- 1-1/2" to 16" Diameter
- 0 to 75 IPM Rotation Speed
- 115V or 230V
- High Frequency Protected
- Standard w/Foot Control Switch
- Adjustable Drive Tension
- Shipping Weight 146 lbs.



Maximum load capacity 2,000 lbs.  
(1,000 lbs. max for each the drive and idler)

Part No.	Description
WP-250	250 lb. Weld Positioner
WP-500	500 lb. Weld Positioner
WPC-11	Chuck for Positioners

Part No.	Description
TR-2000	2000 lb. Turning Rolls



# i-HEAD<sup>®</sup>

## INTERCHANGEABLE HEAD TIG TORCH SERIES



*Flex-Neck*  
WTF

*Ball-Joint*  
WTB

*Roto-Head*  
WTR

WTR-20

WTF-17V

WTB-9

**Problem solvers . . . .**

**Allows access to difficult weld locations.**

**Ideal for pipe and tube welds.**

**TEC Torch Company, Inc.**



**BALL-JOINT MODELS**  
Swivel ball joint head locks in place. Air cooled and water cooled models



**FLEXIBLE-NECK MODELS**  
Air cooled and water cooled models provide solutions for hard to reach welds.



**ROTO-HEAD MODELS**  
Head rotates 360° and locks in place. Air cooled and water cooled models.



**SPEED NUT<sup>™</sup> HOSE CONNECTIONS**  
No more troublesome wire clamps. Quick and easy repairs on water cooled models.

## Tig Packages



Part No.	Description
MW17	Torch, 150 Amp, Air Cooled
MW17-25-2	Torch Pkg. 2 pc. 25'
MW17-25R	Torch Pkg. 1 pc. 25'
MW17F	Flex Torch, 150 Amp, Air Cooled
MW17F-12R	Torch Pkg. 12.5'
MW17F-25R	Torch Pkg. 25'
MW17FV	Flex Torch w/Valve, 150 Amp, Air Cooled
MW17FV-12R	Torch Pkg. 12.5'
MW17FV-25R	Torch Pkg. 25'
MW17V	Torch, w/ Valve, 150 Amp, Air Cooled
MW17V-12R	Torch Pkg. 12.5'
MW17V-25R	Torch Pkg. 25'

Part No.	Description
MW18	Torch, 350 Amp, Water Cooled
MW18-12	Torch Pkg. 12.5' Vinyl
MW18-12R	Torch Pkg. 12.5' Braided
MW18-25	Torch Pkg. 25' Vinyl
MW18-25R	Torch Pkg. 25' Braided
MW18F	Flex Torch, 350 Amp, Water Cooled
MW18FV	Flex Torch w/Valve, 350 Amp, Water

Part No.	Description
MW26	Torch, 200 Amp, Air Cooled
MW26-12-2	Torch Pkg. 2 pc. 12.5'
MW26-12R	Torch Pkg. 1 pc. 12.5'
MW26-25-2	Torch Pkg. 2 pc. 25'
MW26-25R	Torch Pkg. 1 pc. 25'
MW26F	Flex Torch, 200 Amp, Air Cooled
MW26F-12R	Torch Pkg. 12.5'
MW26F-25R	Torch Pkg. 25'
MW26FV	Flex Torch w/Valve, 200 Amp, Air Cooled
MW26FV-12R	Torch Pkg. 12.5'
MW26FV-25R	Torch Pkg. 25'
MW26V	Torch, w/ Valve, 200 Amp, Air Cooled
MW26V-12R	Torch Pkg. 12.5'
MW26V-25R	Torch Pkg. 25'

Part No.	Description
10N23	1/16" Collet
10N24	3/32" Collet
10N25	1/8" Collet
10N31	1/16" Collet Body
10N32	3/32" Collet Body
10N28	1/8" Collet Body
10N48	1/16" Alumina Cups
10N47	3/32" Alumina Cups
10N46	1/8" Alumina Cups

**Maxweld**  
LENCO



Part No.	Description
MW9	Torch, 150 Amp, Air Cooled
MW9-12R	Torch Pkg. 1 pc. 12.5'
MW9-25-2	Torch Pkg. 2 pc. 25'
MW9-25R	Torch Pkg. 1 pc. 25'
MW9F	Flex Torch, 150 Amp, Air Cooled
MW9F-12R	Torch Pkg. 12.5'
MW9F-25R	Torch Pkg. 25'
MW9FV	Flex Torch w/Valve, 150 Amp, Air Cooled
MW9FV-12R	Torch Pkg. 12.5'
MW9FV-25R	Torch Pkg. 25'
MW9V	Torch, w/ Valve, 150 Amp, Air Cooled
MW9V-12R	Torch Pkg. 12.5'
MW9V-25R	Torch Pkg. 25'

Part No.	Description
MW20	Torch, 250 Amp, Water Cooled
MW20-12	Torch Pkg. 12.5' Vinyl
MW20-12R	Torch Pkg. 12.5' Braided
MW20-25	Torch Pkg. 25' Vinyl
MW20-25R	Torch Pkg. 25' Braided
MW20F	Flex Torch, 250 Amp, Water Cooled
MW20F-25R	Torch Pkg. 25' Rubber

Part No.	Description
13N22	1/16" Collet
13N23	3/32" Collet
13N24	1/8" Collet
13N27	1/16" Collet Body
13N28	3/32" Collet Body
13N29	1/8" Collet Body
13N10	1/16" Alumina Cups
13N11	3/32" Alumina Cups
13N12	1/8" Alumina Cups





## Pure Tungsten

Contains a minimum of 99.5% tungsten with no other alloying elements. This allows the tip to form a clean, balled end which provides good arc stability on AC. Pure can be used with DC but does not compare with thoriated or ceriated as far as ease of arc starting. More susceptible to weld contamination than thoriated, ceriated or lanthanated. Usually the least expensive of all tungsten, pure tungsten is generally used in the welding of aluminum and magnesium alloys (AC).

## 2% Thoriated

The most common type of electrode used today. Provides excellent resistance from weld pool contamination while at the same time offers the welder easier arc starting capabilities and a more stable arc. Generally used for DC electrode negative or straight polarity applications such as carbon & stainless steels, nickel alloys and titanium.

## 2% Ceriated

Ceriated is different from thoriated as it is not a radioactive material. Also, the ceriated tungsten tends to last longer than thoriated and can be used proficiently with AC or DC. In manual applications the ceriated tungsten will provide slightly different electrical characteristics than the thoriated tungsten but generally no difference will be seen by the operator. Generally used to weld carbon & stainless steels, nickel alloys and titanium.

## 1.5% Lanthanated

This type of tungsten is very similar to ceriated as it too is a non radioactive material. Lanthanated electrodes operate at slightly different arc voltages than thoriated or ceriated electrodes. Were developed around the same time as ceriated tungsten to help combat the increasing awareness of the radioactivity of thoriated tungsten. Generally used to weld carbon & stainless steels, nickel alloys and titanium.



Part No.	Description
10G7-1/16	Pure Tungsten 7" x 1/16"
10G7-3/32	Pure Tungsten 7" x 3/32"
10G7-1/8	Pure Tungsten 7" x 1/8"
10G7-5/32	Pure Tungsten 7" x 5/32"
30G7-1/16	2% Thoriated Tungsten 7" x 1/16"
30G7-3/32	2% Thoriated Tungsten 7" x 3/32"
30G7-1/8	2% Thoriated Tungsten 7" x 1/8"
30G7-5/32	2% Thoriated Tungsten 7" x 5/32"
40G7-1/16	Zirconiated Tungsten 7" x 1/16"
40G7-3/32	Zirconiated Tungsten 7" x 3/32"
40G7-1/8	Zirconiated Tungsten 7" x 1/8"
50G7-1/16	2% Ceriated Tungsten 7" x 1/16"
50G7-3/32	2% Ceriated Tungsten 7" x 3/32"
50G7-1/8	2% Ceriated Tungsten 7" x 1/8"
50G7-5/32	2% Ceriated Tungsten 7" x 5/32"
70G7-1/16	1.5% Lanthanated Tungsten 7" x 1/16"
70G7-3/32	1.5% Lanthanated Tungsten 7" x 3/32"
70G7-1/8	1.5% Lanthanated Tungsten 7" x 1/8"
70G7-5/32	1.5% Lanthanated Tungsten 7" x 5/32"

## Cable Cover

Cut to length - 100' length x 4 1/2" wide velcro closure.



Part No.	Description
DCP100	Bulk 100' Cut to Length
3-22	25' x 3" Zipper Closure
4-22	25' x 4" Zipper Closure

## Tig Remote Foot & Fingertip Controls

### Fingertip Controls

Available for ESAB, Lincoln and Miller. Connect to torch with included cable ties. 27' cable included, longer cables and extensions are also available.

### Foot Controls

Available for ESAB, Lincoln and Miller. Foot controls are all METAL construction with 25' cable. Extensions are available.

Part No.	Description
TC-2B	ESAB style fingertip control 27' 14 pin
EFC-14	ESAB style foot control 25' 14 pin
LFTC-6	Lincoln style fingertip control 27' 6 pin
LFC-870	Lincoln style foot control 25' 6 pin
MFTC-14	Miller style fingertip control 27' 14 pin
MFTC-5	Miller style fingertip control 27' 5 pin
MFC-14	Miller style foot control 25' 14 pin





## Super Cat



### POWER CAT

The Power Cat Fume Exhaust system is an affordable, portable system featuring a high velocity blower for ventilating and cooling. The intake and exhaust duct accessories make the Power Cat an ideal workmate for the welder. Fitted with a duplex electrical receptacle and 25' heavy duty grounded electrical cord.



Part No.	Description
<b>POWER CAT</b>	
1200XL	800/1200 CFM Power Cat Unit
1200IA	Intake Adaptor
1200FD	Flexible Duct
1200DC	Duct Coupler
1200FE	Fume Exhaust Nozzle
1200EA	Exhaust Adaptor


## Pocket Pro level



Its extra strong magnet will hold firmly to any steel surface. The two (2) stationary vials are placed at 90° angles of each other and can be read from any surface of the level. Vials are easily replaced if broken. The dial is in 2½ degree increments with spring tension for easy operation. Only 9" long and 1½" wide for easy handling and storage.

Part No.	Description
FW-PP-200	Pocket Pro Level

## Magnetic Burning Guide

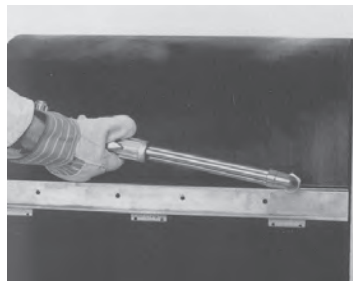

Designed for use with a burning torch or as a straight edge, the Burning Guide is cast of strong, durable material to withstand heat and spatter. The tool's base has three 30-pound pull cast-in magnets for use in any position. A 24-in. blade on a raised plane is standard.

Part No.	Description
C-0721-0025	CM-28 Magnetic Burning Guide

## Pipe Wrap



Screen printed tape measures make mark up much easier. Markings also include circumference and quartering scale which limits the need for calculations because the exact circumference and ¼, ½ & ¾ of the circumference is printed on the outside of the wraps.

Extra small Contour wrap does not include markings.



Part No.	Description
<b>FLANGE WIZARD</b>	
FW-WW-16	2 5/8" x 30" for 1" to 6" Small Pipe
FW-WW-17	3 7/8" x 60" for 2" to 16" Medium Pipe
FW-WW-17A	5 1/4" x 120" for 2" to 30" Large Pipe
FW-WW-18	5 1/4" x custom length (per foot)
FW-WW-18A	7" x custom length (per foot)
<b>CONTOUR WRAP-A-ROUND</b>	
C-0720-0001	1.94" x 24" for 1" to 3" Extra Small Pipe
C-0720-0004	2.5" x 24" for 1" to 3" Small Pipe
C-0720-0007	4" x 48" for 3" to 6" Medium Pipe
C-0720-0010	4" x 72" for 3" to 10" Large Pipe
C-0720-0013	5" x 84" for 4" to 12" Extra large Pipe
C-0720-0016	5" x 108" for 6" to 16" Extra Large Pipe

## Aladdin 3-1 Rod



Low melting point (732° F) 3 in 1 brazing rod. Use to weld zinc base metals, braze aluminum, solder galvanized metal. Repair kirsite dies, power tools, aluminum radiators, propellers, castings and more.

## Rod Guard Cannisters



Rod Guard Cannisters provide great storage and inventory control for all your welding electrodes, rods and filler metals. Cannisters are constructed of high-impact polyethylene and keep electrodes airtight preventing contamination from atmospheric moisture.

Part No.	Description
31-18	1/8" 1 lb. Tube
31-32	3/32" 1 lb. Tube
31-16	1/16" 1 lb. Tube
31-132	1/32" 1 lb. Tube

Part No.	Description
RG-100	14" Cannister
RG-200	18" Cannister
LE100	14" Red Cannister
RG-300	36" Cannister


## Paint Markers



Part No.	Description
<b>Pumper Markers</b>	
04010012	Pumper Marker - White
04010013	Pumper Marker - Yellow
04010014	Pumper Marker - Black
04010015	Pumper Marker - Red
04010016	Pumper Marker - Blue

Part No.	Description
<b>Nissen Metal Markers</b>	
NSMM18-W	1/8" Metal Marker - White
NSMM18-BK	1/8" Metal Marker - Black
NSMM18-R	1/8" Metal Marker - Red
NSMM18-Y	1/8" Metal Marker - Yellow
<b>Nissen Solid Paint Markers</b>	
NSSPM-W	Solid Paint Marker - White
NSSPM-BK	Solid Paint Marker - Black
NSSPM-R	Solid Paint Marker - Red
NSSPM-Y	Solid Paint Marker - Yellow
<b>Jiffco Artline Paint Markers</b>	
EK-400XF-BK	Felt Tip Paint Marker - Black
EK-400XF-BL	Felt Tip Paint Marker - Black
EK-400XF-BR	Felt Tip Paint Marker - Brown
EK-400XF-G	Felt Tip Paint Marker - Green
EK-400XF-R	Felt Tip Paint Marker - Red
EK-400XF-W	Felt Tip Paint Marker - White
EK-400XF-Y	Felt Tip Paint Marker - Yellow

## Silver Welders Pencils

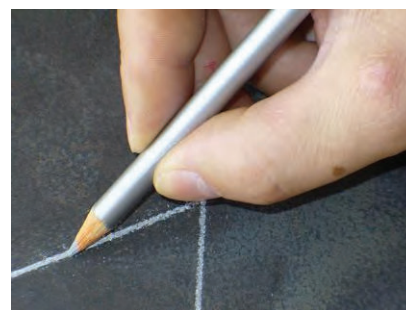


The Nissen Silver Welders Pencil was designed for fine layout work on all metals. The marks will illuminate when cutting or welding.

- Marks don't burn or rub off like soapstone
- Durable marks will not melt or fade
- Pencils will not break like soapstone
- Can be sharpened with an ordinary pencil sharpener

Part No.	Description
NSWPC	Silver Welders Pencil - Card w/ 3 pencils
NSWPD	Silver Welders Pencil - Box of 12 pencils


## Shaded Plates

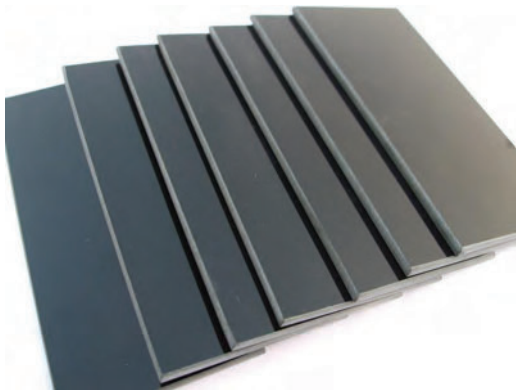

Part No.	Description
<b>GLASS</b>	
MW2H-x	Hardened 2" x 4 1/4" Shades 4-14
MW4H-x	Hardened 4 1/2" x 5 1/4" Shades 5-14
LW2PFS-x	Un-Hardened 2" x 4 1/4" Shades 3-14
LW4PFS-x	Un-Hardened 4 1/2" x 5 1/4" Shades 5-9, 12-14
LW5LFS-x	Un-Hardened 50mm Shades 4 & 6 only
MW2GG-x	Gold Glass 2" x 4 1/4" Shades 9-12
MW4GG-x	Gold Glass 4 1/2" x 5 1/4" Shades 9-12
<b>PLASTIC</b>	
MW2P-x	Polycarb 2" x 4 1/4" Shades 8-12
MW4P-x	Polycarb 4 1/2" x 5 1/4" Shades 8-12
MW2GO-x	Gold Plastic 2" x 4 1/4" Shades 4-12
MW4GO-x	Gold Plastic 4 1/2" x 5 1/4" Shades 9-12


X Add shade number to part number.

## Clear Cover Lens



Part No.	Description
<b>GLASS</b>	
GP-2	2" x 4 1/4" Clear Glass Box of 100 pieces
GP-4	4 1/2" x 5 1/4" Clear Glass
<b>PLASTIC</b>	
PP-2	CR-39 2" x 4 1/4"
PP-4	CR-39 4 1/2" x 5 1/4"
G20-SP24	Polycarbonate 2" x 4 1/4"
G20-SP45	Polycarbonate 4 1/2" x 5 1/4"
<b>Replacement Lens Suitable for Hornell</b>	
04-0270-00	Outside Cover Lens 9000 Series 10/pk
04-0280-00	Inside Cover Lens 9000X & XF 5/pk
04-0290-00	Inside Cover Lens 9000F & V 5/pk

## Fibre Metal Style Windows

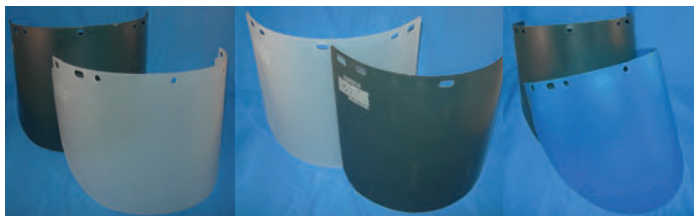

Part No.	Description
UV4118MC	8" x 11" Molded Clear
UV4118MDG	8" x 11" Molded Dark Green
UV4178MC	8" x 16 1/2" Molded Clear
UV4178MDG	8" x 16 1/2" Molded Dark Green
UV4199C	9 3/4" x 19" Flat Clear
UV4199MC	9 3/4" x 19" Molded Clear
UV4199MDG	9 3/4" x 19" Molded Dark Green
UV4199-05	9 3/4" x 19" Flat Shade 5

Part No.	Description
<b>MAGNIFIER PLATES</b>	
18100	1.00 Magnifier Plate 2" x 4 1/4"
18125	1.25 Magnifier Plate 2" x 4 1/4"
18150	1.50 Magnifier Plate 2" x 4 1/4"
18175	1.75 Magnifier Plate 2" x 4 1/4"
18200	2.00 Magnifier Plate 2" x 4 1/4"





## 290 Series Helmet features

- super slim design
- extended crown for greater overhead protection
- rigid bib deflects spatter

## Titan Helmet features

- durable incredible heat resistance
- elongated spatter deflecting bib design
- unique front load bezel

Part No.	Description
29311	Silver, Nylon, 2" x 4 1/4" Lift Front
29301	Black, Nylon, 2 x 4 1/4" Fixed Front
29341	Blue, Nylon, 2" x 4 1/4" Lift Front
29911	Silver, Nylon 4 1/2" x 5 1/4" Fixed Front
24400	Titan, 5 1/4" x 4 1/2" w/ Black Bezel

## Headgear & Sweatbands



20-3100V - for helmet headgear  
20-3200V - for suspension headgear

Part No.	Description
20-3100V	SWEATSOPAD Headband Package of 2
20-3200V	SWEATSOPAD Headband Package of 2
27001	Replacement Head Gear for Sellstrom




Convenient system gives you the flexibility to handle various types of grinding, brazing and flame cutting.

The Dp4 faceshield combines a clear anti-fog window with a flip-down ir window providing uninterrupted protection for grinding, cutting and brazing operations. The shield curves naturally to fit facial contours - ensuring reliable protection from splash, particles and flying debris.

Part No.	Description
32010	Clear Anti Fog Lens
32151	Clear Anti Fog Lens w/Flip up Shade 5

## Auto Darkening Filters

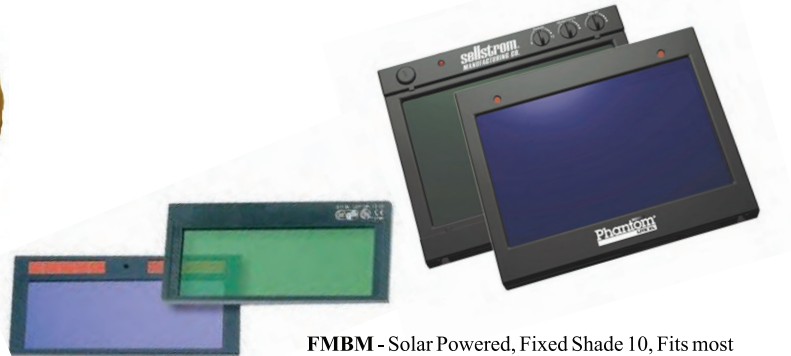

**FMBM** - Solar Powered, Fixed Shade 10, Fits most helmets.

**Phantom** - Variable Shade, Batteries included

**Phantom Lite XL** - Viewing area 3.94" x 2.36", light state shade 3

Part No.	Description
FMBM10	ADF Filter Drop In 2" x 4 1/4"
27401	Striker Solar Module 4 1/2" x 5 1/4"
27070-60	Phantom Lite XL Module 4 1/2" x 5 1/4"

## Leather Bib



Part No.	Description
21100	Leather Protective Bib



FM110PEWCSA



FM906BE-CSA



FM906GY-CSA



FM990GY-CSA



FM2090BK-CSA

Part No.	Description
FM906BE-CSA	Tigerhood Classic 2x4 Flip - Blue
FM906BK-CSA	Tigerhood Classic 2x4 Flip - Black
FM906GY-CSA	Tigerhood Classic 2x4 Flip - Gray
FM990GY-CSA	Tigerhood Classic 4x5 Fixed - Gray
FM2006SR-CSA	Tigerhood Futura 2x4 Flip - Silver
FM2090BK-CSA	Tigerhood Futura 4x5 Fixed - Black
FM110PWECSA	Pipeliner w/ CP Rubber Headband



FMP2HNQRW



FM3C



Part No.	Description
FM3C	Standard Ratchet Headgear
FMP2HNQRW-FM	Super 8 Roughneck Hard Hat Sweatband - Cotton Absorbant



FMF300CSA



FMF400CSA



FMF500CSA



FM4118CL



FM4118DGN



FM4178CL



FM4178DGN



FM4199CL



FM4199DGN

Part No.	Description
FMF300CSA	2" Crown - Ratchet Headgear
FMF400CSA	4" Crown - Ratchet Headgear
FMF500CSA	7" Crown - Ratchet Headgear
FM4118CL	8" x 11 1/4" Clear Window
FM4118DGN	8" x 11 1/4" Dark Green Window
FM4178CL	8" x 16 1/2" Clear Window
FM4178DGN	8" x 16 1/2" Dark Green Window
FM4178IRUV5	8" x 16 1/2" IRUV Shade 5 Window
FM4199CL	9 3/4" x 19" Clear Window
FM4199DGN	9 3/4" x 19" Dark Green Window
FM4199IRUV5	9 3/4" x 19" IRUV Shade 5 Window

Weldas new *Arc Knight*™ line is made of heavy duty FR Cotton to keep you cool and comfortable with leather in the areas where maximum durability is needed.

**Arc Knight**™

**38-4350**

*Arc Knight*™ Jacket  
Size: M – XXXL

- FR roll up collar
- Heavy Duty FR Cotton
- Leather in areas that take the most abuse on the job
- Interior spatter guard prevents sparks and debris from entering the jacket
- Inside valuables pocket
- Roll up collar protects neck from spatter and UV exposure



PATENT PENDING



**44-7029**

*Gauntlet Guard* Forearm Protection

- Built in cushion for maximum comfort
- High grade leather for heat protection
- Hook and Loop closure



**38-4321**

*Arc Knight*™ Sleeves

- Heavy Duty FR Cotton
- Elastic Wrist Closure
- Hook and Loop Bicep Closure



**WELDAS**®  
The Professional's Choice



## Hi-Lo Welding Gauge



GAL-1


GAL Gages are constructed of top quality Stainless Steel and feature laser engraved markings to ensure accuracy.



## 7 Piece Fillet Weld Set



## Pocket Fillet Weld Gauge Set



## Economy Single Purpose Hi-Lo Gauge



## V-Wac Weld Gauge



## A.W.S. Weld Size Gauge



## Bridge Cam Gauge



## Brief Case Gauge Kit

Part No.	Description
GAL-1	Hi-Lo Welding Gauge
GAL-2	Econo Single Hi-Lo Welding Gauge
GAL-4	Cambridge Type Gauge
GAL-5	V-Wac 1/64" Tolerance Gauge
GAL-6	AWS Type Gauge
GAL-8	Fillet Weld Gauge Set (7 pc)
GAL-10	Fillet Weld Gauge Set (3 pc)
GAL-12B	Brief Case Complete Inspection Kit

# EASYkleen PLUS BRUSH

## DC Weld Electropolisher



**MADE IN AUSTRALIA**

Part Number **EKP100** Includes:

- 1 x EKP105 Spot Brush
- 1 x EKP106 Craftsman Brush
- 1 x EKP107 MIG Brush
- 1 x EKP114 Master Brush
- 1 x EKP110 Handle & Lead
- 1 x EKP111 Power Lead
- 1 x EKP112 Clamp & Lead
- 1 x EKP102 Solution
- 1 x Manual

The EASYkleen Plus Brush is a high powered DC only unit using a patented waveform which is optimized to “shake” the surface particles loose, meaning lightning fast cleaning speed. It has a range of brush electrodes to suit all weld types. It can clean TIG, MIG and stick welds whilst providing the highest possible corrosion resistance due to it using the process of electro-polishing. Highly portable with great reliability and very low running costs, the EASYkleen Plus Brush is a must have for any stainless steel fabricator.

## Accessories

### Specifications

- Input 110v 50-60 Hz
- Output 30-80 amps
- DC only output
- Dual transformer
- 100% duty cycle
- 8 kgs in weight
- No load voltage <35 VDC
- Generator safe

### Benefits

- Simple to use
- Low ongoing running costs
- Safer for user and environment
- Multiple brush options
- Works on TIG, MIG & Stick
- Highest corrosion resistance
- Match any finish (2B to mirror)



\* Warranty only covers machine. Does not cover brushes, handle, clamp or power cable.



# **Redhook Supply Inc.**

**55 Northfield Drive East, Suite # 162  
Waterloo, Ontario  
N2K 3T6**

**(226) 868-4665**

**[jamie@RedhookSupply.ca](mailto:jamie@RedhookSupply.ca)**



**[www.RedhookSupply.ca](http://www.RedhookSupply.ca)**